

06 - LANDSCAPE INDEX OF DRAWINGS

DRAWING NUMBER	DRAWING TITLE	DRAWING NUMBER	DRAWING TITLE
INX-01	INDEX OF LANDSCAPE DRAWINGS		
LDS-01	LANDSCAPE DESIGN SHEET		

THE DESIGN APPEARS TO CONFORM TO APPLICABLE CRITERIA. APPROVAL IS NOT TO BE CONSTRUED TO MEAN THAT ALL ASPECTS OF THE DESIGN HAVE BEEN PERSONALLY CHECKED BY THE UNDERSIGNED.



TRANSPORTATION PRINCIPAL ENGINEER

REV.	DATE	REVISION DESCRIPTION	SHEET NO.

THE INFORMATION, INCLUDING ESTIMATED QUANTITIES OF WORK, SHOWN ON THESE SHEETS IS BASED ON LIMITED INVESTIGATIONS BY THE STATE AND IS IN NO WAY WARRANTED TO INDICATE THE CONDITIONS OF ACTUAL QUANTITIES OF WORK WHICH WILL BE REQUIRED.


DESIGNER/DRAFTER:
MM

CHECKED BY:
SF

**STATE OF CONNECTICUT
DEPARTMENT OF TRANSPORTATION**

Filename: ...\\0058-0335\Landscape\INX-01.dgn

SIGNATURE/
BLOCK:


APPROVED BY:

PROJECT TITLE:
**STONE MASONRY WALL
REHABILITATION
U.S. ROUTE 1**

TOWN: **GROTON**

DRAWING TITLE:
**INDEX OF
LANDSCAPE DRAWINGS**

PROJECT NO. **58-335**

DRAWING NO. **INX-01**

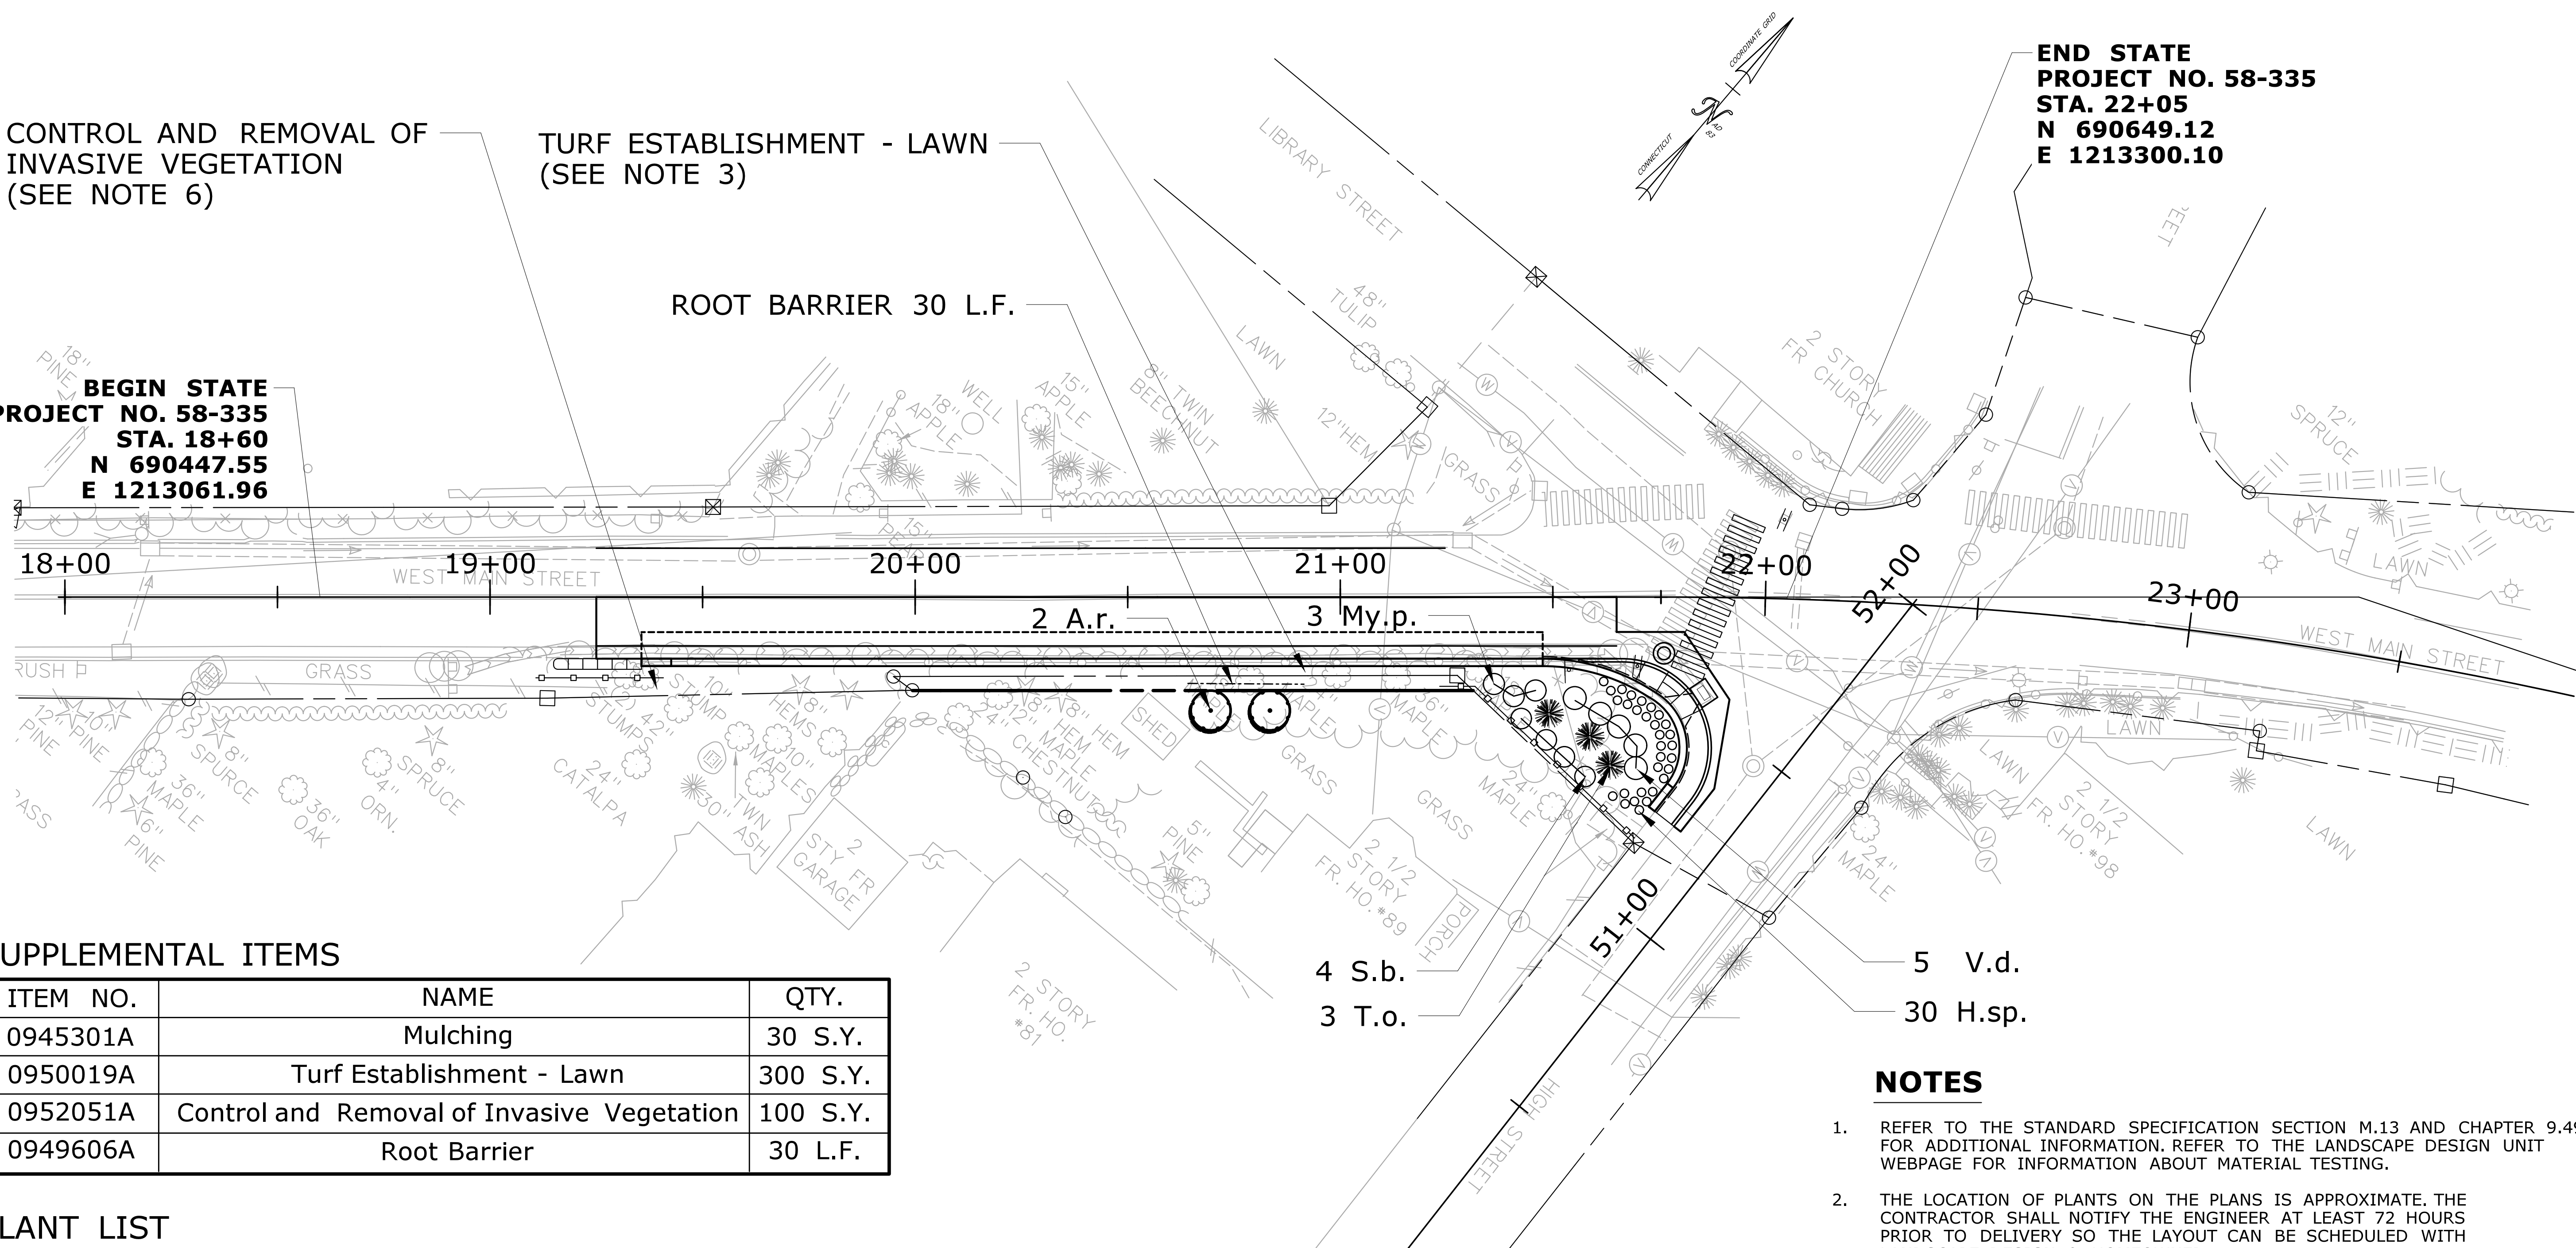
SHEET NO. **06.01**

CONTROL AND REMOVAL OF
INVASIVE VEGETATION
(SEE NOTE 6)

TURF ESTABLISHMENT - LAWN
(SEE NOTE 3)

END STATE
PROJECT NO. 58-335
STA. 22+05
N 690649.12
E 1213300.10

BEGIN STATE
PROJECT NO. 58-335
STA. 18+60
N 690447.55
E 1213061.96



SUPPLEMENTAL ITEMS

ITEM NO.	NAME	QTY.
0945301A	Mulching	30 S.Y.
0950019A	Turf Establishment - Lawn	300 S.Y.
0952051A	Control and Removal of Invasive Vegetation	100 S.Y.
0949606A	Root Barrier	30 L.F.

PLANT LIST

KEY	BOTANICAL NAME	COMMON NAME	SIZE	QTY.	COMMENTS
A.r.	Acer rubrum	Red Maple	1 3/4" - 2" Cal. B.B.	2	SEE NOTE 5
H.sp.	Hemerocallis species	Daylily	1 GALLON CONT.	30	Reblooming
My.p.	Myrica pensylvanica	Northern Bayberry	24"-30" Ht. B.B.	3	
S.b.	Spiraea bumaldi Anthony Waterer	Anthony waterer spirea	30" Ht. Min. B.B.	4	
T.o.	Thuja occidentalis 'Emerald'	Emerald Green Arborvitae	6' - 8' HT. B.B.	3	'Smaragd'
V.d.	Viburnum dentatum	Arrowwood Viburnum	3' - 4' HT. B.B.	5	

NOTES

- REFER TO THE STANDARD SPECIFICATION SECTION M.13 AND CHAPTER 9.49 FOR ADDITIONAL INFORMATION. REFER TO THE LANDSCAPE DESIGN UNIT WEBSITE FOR INFORMATION ABOUT MATERIAL TESTING.
- THE LOCATION OF PLANTS ON THE PLANS IS APPROXIMATE. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AT LEAST 72 HOURS PRIOR TO DELIVERY SO THE LAYOUT CAN BE SCHEDULED WITH LANDSCAPE DESIGN & HOMEOWNER.
- ALL DISTURBED AREAS NOT OTHERWISE DEVELOPED SHALL BE TOPSOILED, PREPARED AND SEEDING WITH TURF ESTABLISHMENT 'LAWN'
- MULCH FURNISHED UNDER THE MULCHING ITEM IS TO BE DOUBLE SHREDDED HARDWOOD MULCH.
- ACER RUBRUMS MAY BE CONTAINER GROWN, BUT MUST BE: COLUMNAR AND INSTALLED USING HAND TOOLS.
- AREAS TO RECEIVE CONTROL & REMOVAL OF INVASIVE VEGETATION SHALL BE DETERMINED IN THE FIELD BEFORE CLEARING OCCURS.
- FINAL LIMITS OF ROOT BARRIER SHALL BE DETERMINED IN THE FIELD.

REV.	DATE	REVISION DESCRIPTION	SHEET NO.	Plotted Date: 4/12/2021

DESIGNER/DRAFTER: MM
CHECKED BY: SF
SCALE IN FEET 0 20 40 SCALE 1"=20'

STATE OF CONNECTICUT
DEPARTMENT OF TRANSPORTATION

SIGNATURE/
BLOCK:
OFFICE OF ENGINEERING
APPROVED BY:
Matthew Vail

PROJECT TITLE:
**STONE MASONRY WALL
REHABILITATION
U.S. ROUTE 1**

TOWN:
GROTON
DRAWING TITLE:
**LANDSCAPE
DESIGN SHEET**

PROJECT NO.
58-335
DRAWING NO.
LDS-01
SHEET NO.
06.02